



INSTALLATION GUIDE

**PERFORMANCE ALUMINUM RADIATOR, FITS 2016+ HONDA CIVIC 1.5T
SKU: MMRAD-CIV-16**

TABLE OF CONTENTS

Pg 01 RESOURCES & CONTACT INFORMATION

Pg 02 IMPORTANT SAFETY INFORMATION

INSTALLATION TIME

INSTALLATION DIFFICULTY

TOOLS NEEDED

INSTALLATION INSTRUCTIONS

Pg 04 DISPOSAL INSTRUCTIONS

WARRANTY INFORMATION

RESOURCES & CONTACT



CALL 1-877-GOMISHI

CUSTOMER SERVICE HOURS: MON-FRI 8:30AM-5:00PM EST



MISHIMOTO



GOMISHIMOTO



MISHIMOTO



WEBSITE



ENGINEERING BLOG

WWW.MISHIMOTO.COM/ENGINEERING

IMPORTANT SAFETY INFORMATION

- › Mishimoto recommends you use safety glasses and protective gloves during the install of their products
- › Raise vehicle only on jack stands or on a vehicle lift
- › Allow vehicle to cool completely prior to attempting installation
- › Do not run the engine or drive the vehicle while overheating; serious damage can occur
- › Please dispose of any liquids properly
- › Mishimoto is not responsible for any vehicle damage or personal injury due to installation errors, misuse, or removal of Mishimoto products
- › If you need any assistance while installing our products, reach out to our Customer Service Team at 1-877-GOMISHI

INSTALLATION TIME **3 HOURS**

INSTALLATION DIFFICULTY

TOOLS NEEDED

5MM ALLEN KEY	PANEL CLIP REMOVAL TOOL(S)
10MM SOCKET	PHILLIPS HEAD SCREWDRIVER
12MM SOCKET	SMALL PICK TOOL
1/4" RATCHET AND EXTENSION	HOSE CLAMP PLIERS

INSTALLATION INSTRUCTIONS

1. Remove front bumper cover from vehicle and remove the upper front core support.
2. Using the drain valve on the lower driver-side corner of the radiator, drain the coolant from the radiator.

3. Disconnect radiator hoses, unbolt the A/C condenser from the radiator, and remove the temperature sensor from the passenger side radiator end tank.
4. Remove the stock radiator from the vehicle with the stock fan assembly attached.
5. Transfer the fan assembly from the stock radiator to the Mishimoto radiator using the stock bolts and torque to 5.2 lb-ft.





6. Remove the lower mounting bushings from the stock radiator and put into position in the lower radiator support.



CONTINUED ON FOLLOWING PAGE

7. Lower the Mishimoto radiator into vehicle and make sure the lower feet are mounted in the lower mount bushings.
8. Install the provided 2X Mishimoto nut clips on the driver-side front brackets and fasten the A/C condenser to the radiator using the Mishimoto provided 10mm long bolts. Torque all four bolts to 5.2 ft-lbs.

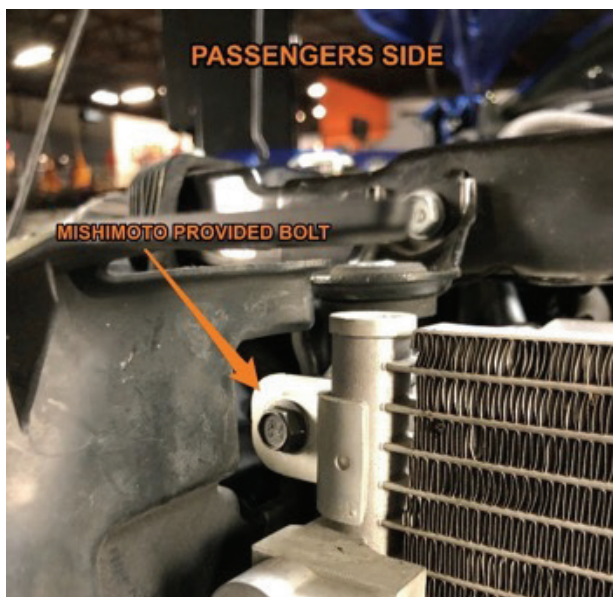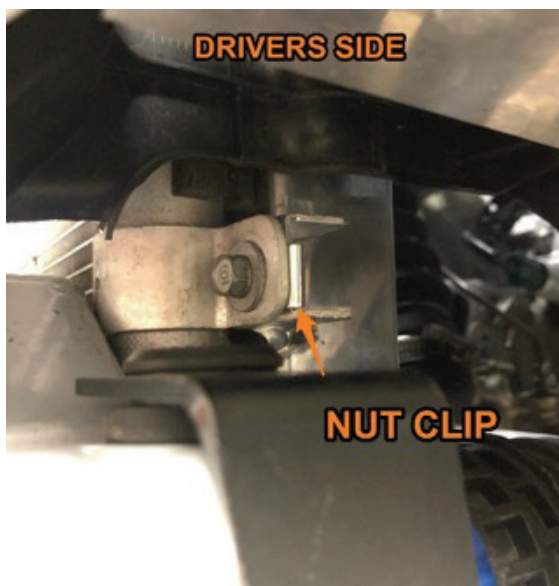

9. Install the temperature sensor into the Mishimoto radiator. Lubricate the O-ring with coolant before installation. Torque to 9 Ft-lbs and reconnect the electrical connector.
10. Connect stock radiator hoses, upper core support, and bumper.
11. Refill and bleed the cooling system.

Congratulations! You have finished your installation.

CONTINUED ON FOLLOWING PAGE

DISPOSAL INSTRUCTIONS

- › Do not dispose of any product as unsorted municipal waste. Use separate collection facilities. Contact your local authority for information regarding the collection systems available.
- › Never improperly dispose of any coolant, oil, or other chemicals.

WARRANTY INFORMATION



- › All claims must be accompanied with a picture of the Mishimoto product showing the issue for which the claim is being submitted.
- › Mishimoto asks that the customer inspect their purchased item for any damage immediately upon arrival.
- › Any product deemed dead on arrival (DOA) must be claimed within 14 business days of delivery. Claims outside of this time frame will not be covered under the Mishimoto Lifetime Warranty.
- › This warranty does not include payment and/or reimbursement of the cost of labor in connection with the removal of any product returned pursuant to the warranty policy or in connection with the installation of any replacement items provided under the warranty policy.
- › Mishimoto has the right to refuse a claim at any time.
- › When Mishimoto accepts a claim, Mishimoto retains full discretion to choose if it will: (i) repair or replace purchaser's original Mishimoto product; (ii) replace purchaser's original Mishimoto product with the most current available model; or (iii) provide the purchaser with a gift card redeemable on [Mishimoto.com](https://www.mishimoto.com) in the amount of the original purchase price of the original Mishimoto product. The provision of a replacement of a Mishimoto product is subject to availability and Mishimoto retains the right to substitute any warranty claim item with a comparable item or credit at any time.

- › If Mishimoto determines that it will provide a replacement item in connection with a claim under this warranty policy, and such item is out of stock, Mishimoto will place the customer on backorder and ship the replacement product to the purchaser once it becomes available.
- › Mishimoto is not liable for incorrect shipments in connection with a claim if a claim form is completed incorrectly, or if a model number is not included in a claim.
- › If you have a vehicle equipped with an automatic transmission, please make sure to specify this within the text box on the claim form. Mishimoto is not responsible for incorrect replacement shipments if transmission type is not indicated.



WARNING
Cancer and
Reproductive Harm
www.P65Warnings.ca.gov

This product can expose you to chemicals which are known to the state of California to cause cancer. For more information visit: www.p65warnings.ca.gov