



# INSTALLATION GUIDE

**Silicone Induction Hose, Fits 2022+ Subaru BRZ & Toyota GR86**  
**SKU: MMHOSE-BRZ-22IH**

## TABLE OF CONTENTS

- Pg 1** RESOURCES AND CONTACT INFORMATION
- Pg 2** IMPORTANT SAFETY INFORMATION  
REQUIRED TOOLS  
INSTALLATION INSTRUCTIONS
- Pg 4** DISPOSAL INSTRUCTIONS  
WARRANTY INFORMATION

## RESOURCES & CONTACT



**CALL 1-877-GOMISHI**

CUSTOMER SERVICE HOURS: MON-FRI 8:30AM-5:00PM EST



**MISHIMOTO**



**GOMISHIMOTO**



**MISHIMOTO**



**WEBSITE**

[WWW.MISHIMOTO.COM](http://WWW.MISHIMOTO.COM)



**ENGINEERING BLOG**

[WWW.MISHIMOTO.COM/ENGINEERING](http://WWW.MISHIMOTO.COM/ENGINEERING)

## IMPORTANT SAFETY INFORMATION

- › Mishimoto recommends you use safety glasses and protective gloves during the installation of our products
- › Raise vehicle only on jack stands or on a vehicle lift
- › Allow vehicle to cool completely prior to attempting installation
- › Do not run the engine or drive the vehicle while overheating; serious damage can occur
- › Please dispose of any liquids properly
- › Mishimoto is not responsible for any vehicle damage or personal injury due to installation errors, misuse, or removal of Mishimoto products
- › If you need any assistance while installing our products, reach out to our Customer Service Team at 1-877-GOMISHI

## INCLUDED PARTS

SILICONE INDUCTION HOSE & CLAMPS

## REQUIRED TOOLS

1/4" SOCKET DRIVER  
 7MM SOCKET  
 8MM SOCKET  
 10MM SOCKET  
 CHANNELLOCK OR NEEDLE-NOSE PLIERS  
 LARGE PICK TOOL

**INSTALL TIME: 30 MINUTES**


**INSTALL DIFFICULTY:** 

## DISCLAIMER

- › **To avoid potential injury, wait for the engine to cool off before beginning installation.**

## INSTALLATION INSTRUCTIONS

1. Using channellock or needle nose pliers, loosen the hose clamp (A) and remove the plastic fitting from the intake hose. Using a 10mm socket, loosen the hose clamp (B). Using an 8mm socket, loosen the hose clamp (C). Remove the stock intake hose from the vehicle.

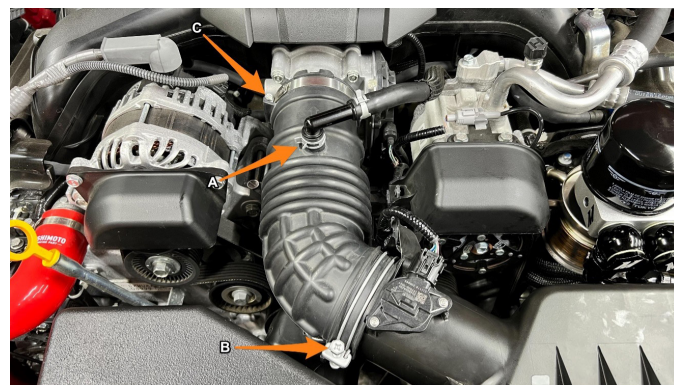

2. Using channellock or needle nose pliers, loosen the hose clamp and remove the plastic resonator from the stock intake hose.



3. Slide the 30-45mm hose clamp onto the large port on the Mishimoto intake hose and install the resonator removed in the previous step in the orientation shown. Using a 7mm socket, tighten the hose clamp.





4. Slide the 80-100mm hose clamp over the throttle body side of the Mishimoto intake hose and the 70-90mm clamp over the MAF side. Install the hose assembly onto the throttle body side first, then use a large pick tool to work the other end of the hose over the MAF housing flange making sure to fully seat the hose against the shoulders on the throttle body/MAF housing. Slide the 16-25mm hose clamp over the top port on the intake hose, then push the plastic fitting into the port. Using a 7mm socket to tighten the three hose clamps. Check to ensure enough clearance between the resonator and the belt/pulley on the front of the engine. Adjust the resonator orientation and re-tighten the clamp if needed.

**Congratulations! You have finished your installation.**



## DISPOSAL INSTRUCTIONS

- › Do not dispose of any product as unsorted municipal waste. Use separate collection facilities. Contact your local authority for information regarding the collection systems available.
- › Never improperly dispose of any coolant, oil, or other chemicals.

## WARRANTY INFORMATION



- › All claims must be accompanied with a picture of the Mishimoto product showing the issue for which the claim is being submitted.
- › Mishimoto asks that the customer inspect their purchased item for any damage immediately upon arrival.
- › Any product deemed dead on arrival (DOA) must be claimed within 14 business days of delivery. Claims outside of this time frame will not be covered under the Mishimoto Lifetime Warranty.
- › This warranty does not include payment and/or reimbursement of the cost of labor in connection with the removal of any product returned pursuant to the warranty policy or in connection with the installation of any replacement items provided under the warranty policy.
- › Mishimoto has the right to refuse a claim at any time.

- › When Mishimoto accepts a claim, Mishimoto retains full discretion to choose if it will: (i) repair or replace purchaser's original Mishimoto product with the most current available model; or (ii) provide the purchaser with a gift card redeemable on [Mishimoto.com](https://www.mishimoto.com) in the amount of the original purchase price of the original Mishimoto product. The provision of a replacement of a Mishimoto product is subject to availability and Mishimoto retains the right to substitute any warranty claim item with a comparable item or credit at any time.
- › If Mishimoto determines that it will provide a replacement item in connection with a claim under this warranty policy, and such item is out of stock, Mishimoto will place the customer on backorder and ship the replacement product to the purchaser once it becomes available.
- › Mishimoto is not liable for incorrect shipments in connection with a claim if a claim form is completed incorrectly, or if a model number is not included in a claim.
- › If you have a vehicle equipped with an automatic transmission, please make sure to specify this within the text box on the claim form. Mishimoto is not responsible for incorrect replacement shipments if transmission type is not indicated.



**WARNING**  
Cancer and  
Reproductive Harm  
[www.P65Warnings.ca.gov](https://www.P65Warnings.ca.gov)

This product can expose you to chemicals which are known to the state of California to cause cancer. For more information visit: [www.p65warnings.ca.gov](https://www.p65warnings.ca.gov)