


# MISHIMOTO

## INSTALLATION STEPS:

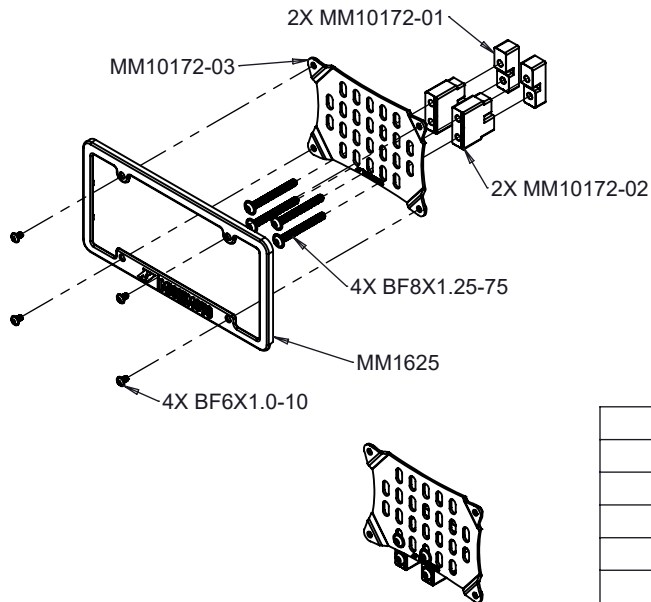

1. ORIENTATE EACH SET OF MM10172-02 AND MM10172-01 SO THAT THE NOTCH IS FACING DOWNWARD, INSERT TWO OF THE LONGER BF8X1.25-75 BOLTS THROUGH THE BRACKET ASSEMBLY MM10172-03 AND THROUGH THE TOP HOLE ON EACH OF THE MM10172-02 PARTS AS DEPICTED. YOU WILL NEED TO USE THE LOWER SLOTS ON THE BRACKET ASSEMBLY.
2. THREAD EACH OF THE BOLTS INTO THE TWO MM10172-01 PARTS BUT DO NOT FULLY TIGHTEN. THE MM10172-01 PARTS SHOULD BE ABLE TO MOVE FREELY.
3. SELECT AN APPROPRIATE LOCATION ON THE GRILL AND ROTATE EACH OF THE MM10172-01 PARTS SO THAT THEY ARE PARALLEL WITH THE HORIZONTAL SLOTS OF THE GRILL.
4. INSERT EACH OF THE MM10172-01 PARTS INTO THE GRILL. THEY SHOULD ROTATE AND FALL INTO PLACE ONCE THROUGH.
5. INSTALL THE REMAINING TWO BF8X1.25-75 BOLTS THROUGH THE LOWER HOLE ON EACH OF THE MM10172-02 PARTS AND THREAD INTO THE MM10172-01. THE BOTTOM BOLTS DO NOT PASS THROUGH THE SLOTS ON THE BRACKET ASSEMBLY.
6. TORQUE THE FOUR BOLTS TO 88.5 IN/LBS (10NM).
7. ATTACH YOUR LICENSE PLATE AND FRAME MM1625 USING THE FOUR SMALLER BF6X1.0-10 BOLTS AND A 4MM ALLEN KEY.

### BILL OF MATERIALS

PART NUMBER	DESCRIPTION	QTY.
MM10172-01	INNER PART	2
MM10172-02	OUTER PART	2
MM10172-03	BRACKET ASSEMBLY	1
MM1625	PLATE FRAME	1
BF6X1.0-10	M6X10MM BUTTON HEAD FLANGED BOLT	4
BF8X1.25-75	M8X75MM BUTTON HEAD FLANGED BOLT	4

FOR QUESTIONS OR ASSISTANCE WITH YOUR MISHIMOTO PRODUCT,  
CONTACT US AT 1.877.GOMISHI OR SUPPORT@MISHIMOTO.COM